1. SIDÈREA BKL WIFI CONNECTION PROCEDURE

1. Start Wifi search
2. Connecting to the Siderea BKL network
3. Enter password: Faro1948

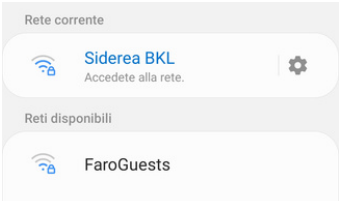

CThe web page appears where you can set various parameters such as:

- on/off times for the whole week of the ambient light.
- Start time for the whole week with corresponding cycle duration for BKL function
- Electronic Board usage conunters
- Counters for different ambient light scenarios.
- Counter of disinfection hours
- Indirect light illuminant can be switched on and off.

How to connect Sidèrea BKL to the studio's wifi network

A. Click on Setup

The following page is displayed:

User: admin
Password admin

B. Click on the top right menu and select **"Configure new AP"**

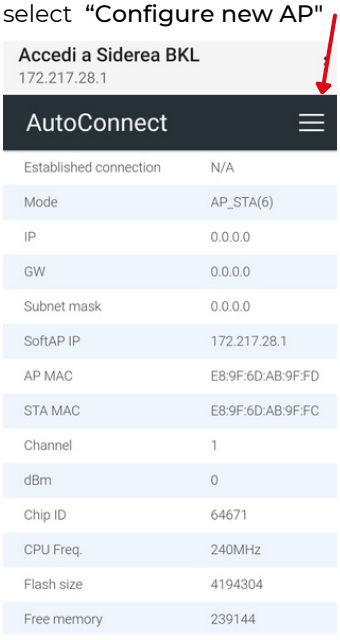

The following screen appears where you can view the networks present in the study:

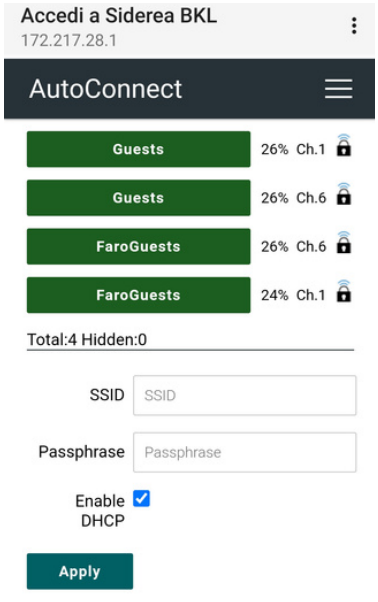

C. Choose the network you want to connect to, enter the password and click Apply, the system will reboot and redirect the page to the new IP address that was acquired

2. STATIC IP SETTING

Configuring a static IP address allows the user to connect the lamp to a predefined network.
N.B. It is recommended to have this activity carried out by experienced IT personnel.

A. Click ok Setup

B. Click on the top-right menu and select "Configure new AP"

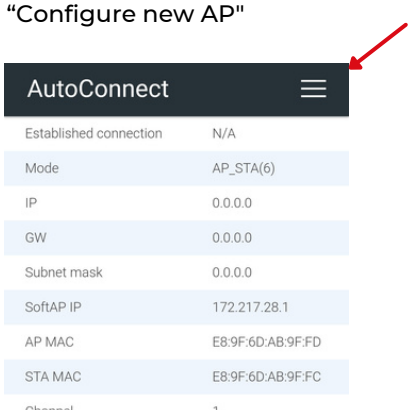

C. Disable "Enable DHCP"

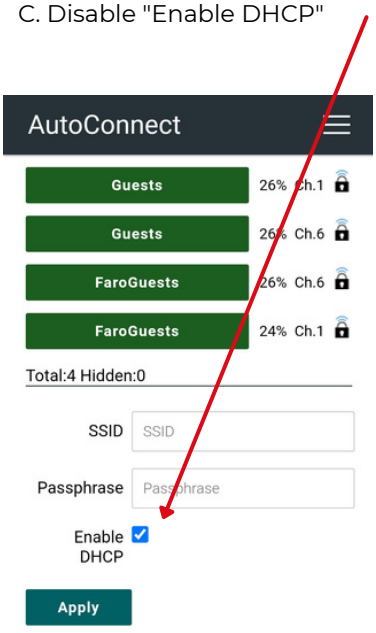
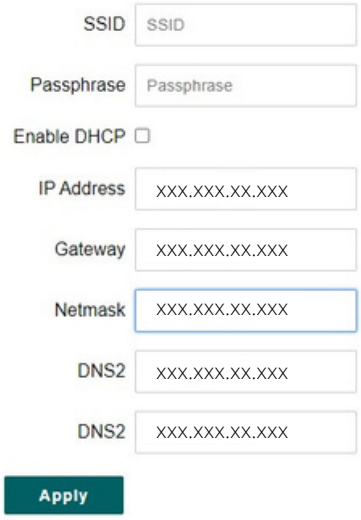
D. Enter the required data on the next screen.